
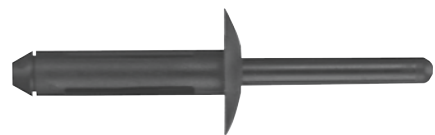

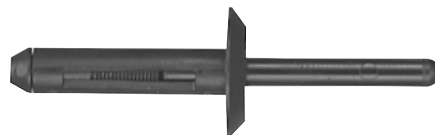



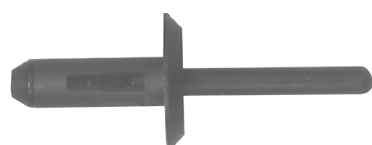














1485107

Nylon Rivets

PHOTOS ACTUAL SIZE

<p>1</p>	<p>2</p>	<p>3</p>	<p>4</p>
<p>5</p>  <p>KT11282</p>  <p>OEM Nos.: GM 15614746, Chrysler 34201631 17mm Flange Dia., 4mm – 10mm Grip Range Fits into M6.3 Hole Dia.</p>	<p>6</p>  <p>P21213</p>  <p>OEM Nos.: Chrysler 6500911, GM 14063981, Ford N803043-S 11/16" Flange Dia., 5/32" – 3/8" Grip Range Fits into 1/4" Hole Dia.</p>	<p>7</p>  <p>P48982</p>  <p>OEM Nos.: Chrysler 4370138 and 6503860, Ford N804675-S 11/16" Flange Dia., 5/16" – 33/64" Grip Range Fits into 1/4" Hole Dia.</p>	<p>8</p>
<p>9</p>  <p>P26118</p>  <p>OEM Nos.: GM 20433026, VW 175-853-577A 11/16" Flange Dia., 3/32" – 3/16" Grip Range Fits into 17/64" Hole Dia.</p>	<p>10</p>  <p>KT13750</p>  <p>OEM No.: BMW 51-71-7-002-953 25/32" Flange Dia., 7/64" – 3/16" Grip Range</p>	<p>11</p>  <p>P21197</p>  <p>OEM Nos.: Chrysler 6501559, GM 10184895 and 20452072 1/2" Flange Dia., 5/32" – 13/32" Grip Range Fits into 1/4" Hole Dia.</p>	<p>12</p>
<p>13</p>  <p>P21239</p>  <p>OEM Nos.: Chrysler 6503800, GM 20432975, VW 175-853-577-01C 15/32" Flange Dia., 1/8" – 5/64" Grip Range Fits into 13/64" Hole Dia.</p>	<p>14</p>  <p>P27721</p>  <p>OEM No.: Chrysler 6500859 1/2" Flange Dia., 1/8" – 5/32" Grip Range Fits into 3/16" Hole Dia.</p>	<p>15</p>  <p>P21267</p>  <p>OEM Nos.: Chrysler 6500898, GM 15718794 15/32" Flange Dia., 15/64" – 25/64" Grip Range Fits into 13/64" Hole Dia.</p>	<p>16</p>  <p>P26088</p>  <p>OEM Nos.: GM 15955172 and 20421672 1/2" Flange Dia., 3/32" – 3/16" Grip Range Fits into 17/64" Hole Dia.</p>