
ZINC-RICH GALVANIZING COMPOUND



740



- Low VOC³
- 97% pure zinc dust
- Meets MIL-P-26915D
- Non-sagging
- Stops rust
- Covers in one coat

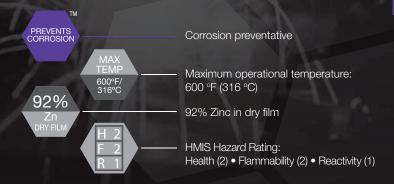

PRESERVE. PROTECT. PREVENT."

Sprayon[®] WL[™]740 Zinc-Rich Galvanizing Compound is a high performance primer containing 97% pure zinc dust pigment blended with epoxy resin. Stops rust by electro-chemical action on steel or galvanized coatings. The self-sacrificing zinc protects the base metal, preserving strength and prevents rust creepage when the area is penetrated or scratched. This compound fuses zinc to the metal substrate and delivers protection against corrosion equal to or better than hot dipped galvanize.

WELDING

USES

- For use in automotive, marine, nuclear facilities, power plants and refineries.
- Industrial tanks
- Piping
- Welded joints
- Bridges
- Farm equipment
- Fences
- Wrought iron
- Gutters
- Structural steel
- Transmission towers
- Galvanized surfaces





WL740

© 2010 Sprayon® Products Made in U.S.A.

SURFACE PREPARATION

Must be applied directly to dry, clean metal or galvanized surfaces and not over any other paint or coating. Proper surface preparation contributes to maximum service life of coatings. All contaminates (mill scale, rust, rust scale, chemicals, grease, oil, wax, weld spatter, old paint or other foreign matter must be removed down to bare metal.

Product should be sprayed in a well ventilated area. Sprays best at room temperature (70°F.). Shake well before using. Spray at a distance of 8" to 10" from surface.

PERFORMANCE

Meets MIL-PRF-26915D: Yes

- Highly resistant to salt corrosion and water
- May be top-coated with conventional finish coats
- Prevents rust creepage
- Equal performance to hot dipped galvanize
- Self-sacrificing

DRY HEAT RESISTANCE: 400°F constant, 600°F intermittently

CHEMICAL RESISTANCE:	Moderate	Severe
Aliphatic hydrocarbon solvents	X	
Alkalis	X	
Aromatic hydrocarbon solvents		X
Chlorinated solvents		Χ
Salt water		Χ
Glycol ethers, alcohols		Χ
Inorganic acids		Χ
Organic acids		Χ
Oils	Χ	

DRYING TIME @ 70°F @ 50%R.H.

TO TOUCH: 10-15 minutes

TO HANDLE: 1 hr.

RECOAT: 2 to 16 hrs. or after 36 hrs.

CLEAN UP: Xvlene

RESOURCES

MSDS/EDS/PRODUCT DATA SHEETS: sprayon.com

CUSTOMER SERVICE: 1-800-777-2966 TECHNICAL INFORMATION: 1-800-251-2486

PROPERTIES

AEROSOL

RESIN TYPE: EDOXV

APPEARANCE: Medium Grav

PROPELLANT: Hydrocarbon Blend

SHEEN: Low Gloss

% SOLIDS: 51.50%

DRY FILM WEIGHT:

ZINC DUST: 92.00%

RESIN: 8.00%

PIGMENT: Per ASTM D520, Type I

97% Zinc Dust

WT./GAL.: 9.60

SPECIFIC GRAVITY: 1.16

HAZARD CODE: 2.2.1

VOC: 48.50%

MIR: 0.81

OTC & CALIFORNIA COMPLIANT: Yes

FLAMMABLE: Yes

FLASH POINT: < 0°F

RECOMMENDED FILM THICKNESS:

1 - 2.5 mils wet

COVERAGE PER AEROSOL (THEORETICAL):

22 sq. ft. per can

SHELF LIFE: 3 years from date of

manufacture

PACKAGING

STOCK #: S00740000 UPC CODE: 0-75577-90740-3

FILL WT.: 14 oz.

PER CASE: 6 **CARTON DIMENSIONS:**

L 6" x W 9" x H 8.5"



Distributed by:

Lawson Products, Inc.

To order these and other products, contact us: 866-529-7664 lawsonproducts.com





Sprayon® Products 101 Prospect Ave. NW Cleveland, OH 44115 Sprayon.com 1-800-777-2966